

SECUREPAC[®] - 256 AES

**WITH USB 3.0 INTERFACE
& CRUSH-PROOF CARRY CASE**




TAA Compliant



500GB / 1TB / 2TB



3TB / 4TB / 5TB

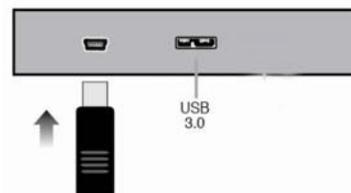

ENCRYPTION SOLUTIONS

Portable & Secure Encrypted Storage Solution

The SecurePac features “real-time hardware based encryption” using NIST/CES certified 256-AES encryption algorithms. The SecurePac offers 500GB to 5TB of storage and connects through any existing USB 3.0/2.0 port. All connections are “hot-swap”, require no additional software or drivers and provide ~90MB/s data transfer rates. The small size and light weight make it the perfect option for use with laptop computers, but the high capacity and fast data transfer rates can easily handle desktop back-up as well. The SecurePac has rugged aluminum frame and comes with a crush-proof and water-resistant IP67 rated storage/carry case.

Features	
Capacity	500GB, 1TB, 2TB, 3TB, 4TB, and 5TB
Interface	USB 3.0/2.0
Max. Interface Transfer Speed	USB 3.0 = 5Gb/s (5000 Mbps)
Typical Data Transfer Rate	USB 3.0 = 90MB/s (720 Mbps)
Dimension (LxWxH)	5.0 x 3.1 x 1.0 inches 125 x 78 x 24 mm
Weight	SecurePac: 0.5 lbs / 210 g Complete kit: 1.2 lbs / 520 g
Material	Clear anodized aluminum frame Black HDPE water-resistant, crush-proof case
Power Source	USB 3.0/2.0 Bus powered
Complete Kit Includes	Encrypted SecurePac cartridge; USB 3.0 data/power cable; Encryption key-tokens (3); Crush-proof HDPE carry case; Quick-start Manual



TAA Compliant



AUDAVI Corporation
1310 Tully Road; Suite 111
San Jose, CA 95122

Phone: 408-947-8300
Fax: 408-947-8333
Email: info@audavi.com
Website: www.audavi.com
CAGE: 3DJV2 DODAAC: Q92265

SEWP-IV CLIN

- A873232/MPHE-U256-500
- A873231/MPHE-U256-1TB
- A873233/ MPHE-U256-2TB
- TBD / MPHE-U256-3TB*
- TBD / MPHE-U256-4TB*
- TBD / MPHE-U256-5TB*



USB 3.0 Connection

The USB cable provides bus power and the high speed data connection for the drive. The USB 3.0 connection is backwards compatible with any existing USB 2.0 port.

Environmental Specifications

Operating
 Temperature: 5°C to 40°C
 Humidity: 20% to 80% RH
 Altitude: 3500m
 Shock: 1500Gs (2ms)

Storage
 Temperature: -20°C to +70°C
 Humidity: 10% to 90% RH
 Altitude: 10,000m
 Shock: 5000Gs (0.5ms)




* Due to HDD Z-height 3, 4, & 5TB models come in extruded aluminum case



All Kits Contain

- ☑ SecurePac cartridge (500GB-5TB)
- ☑ USB 3.0 data/power cable
- ☑ 256-AES Encryption Keys (3)
- ☑ Water-resistant/crush-proof case

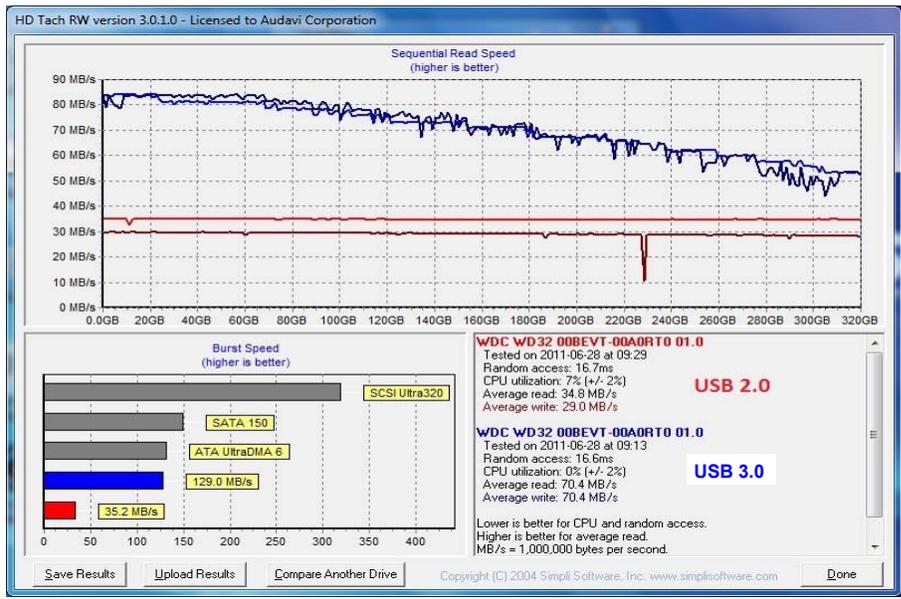

AUDAVI Corporation
 1310 Tully Road; Suite 111
 San Jose, CA 95122

Phone: 408-947-8300
 Fax: 408-947-8333
 Email: info@audavi.com
 Website: www.audavi.com
 CAGE: 3DJV2 DODAAC: Q92265